


RE-Series - Valve Regulated Lead Acid Battery

RE7-12

| SPECIFICATIONS | | |
|---|----------------|------------|
| Nominal voltage | 12 | V |
| 20-hr rate Capacity to 1.75VPC at 20°C | 7 | Ah |
| 10-hr rate Capacity to 1.75VPC at 20°C | 6.2 | Ah |
| DIMENSIONS | | |
| Length | 151 (±1) | mm |
| Width | 65 (±1) | mm |
| Height | 94 (±1) | mm |
| (height over terminals) | 97,5 (±1) | mm |
| Mass (typical) | 2.75 (2.65) | kg |
| TERMINAL TYPE | | |
| FASTON (Quickfit / release) | 4.8 | mm |
| OPERATING TEMPERATURE RANGE | | |
| Storage | -15°C to +40°C | |
| Charge | -0°C to +40°C | |
| Discharge | -15°C to +50°C | |
| STORAGE | | |
| Capacity loss per month at 20°C (approx) | 3 | % |
| CASE MATERIAL | | |
| Standard - Flame Retardant | ABS (UL94:V0) | |
| Option | ABS (UL94:HB) | |
| CHARGE VOLTAGE | | |
| Float charge voltage at 20°C | 13.65 (±1%) | V |
| | 2.275 (±1%) | V/cell |
| Float Charge voltage temperature correction factor (for variations from the standard 20°C) | -3 | mV/cell/°C |
| Cyclic (or Boost) charge at 20°C | 14.5 (±3%) | V |
| | 2.42 (±3%) | V/cell |
| Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C) | -4 | mV/cell/°C |
| CHARGE CURRENT | | |
| Float charge current limit | No limit | A |
| Cyclic (or Boost) charge current limit | 1.75 | A |
| MAXIMUM DISCHARGE CURRENT | | |
| 1 second | 105 | A |
| 1 minute | 42 | A |
| SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE | | |
| (according to EN IEC 60896-21) | | |
| Internal resistance | N/A | mΩ |
| Short-Circuit current | N/A | A |
| IMPEDANCE | | |
| Measured at 1 kHz | 35 | mΩ |
| PERFORMANCE & CHARACTERISTICS | | |
| Refer to the technical manual | RE | |
| DESIGN LIFE | | |
| EUROBAT Classification: General purpose | 6 to 9 | years |
| Yuasa design life @ 20°C | up to 10 | years |
| SAFETY | | |
| Installation | | |
| Can be installed and operated in any orientation except permanently inverted | | |
| Handles | | |
| Batteries must not be suspended by their handles (where fitted) | | |
| Vent valves | | |
| Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal. | | |
| Gas Release | | |
| VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container | | |
| Recycling | | |
| YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations | | |



LAYOUT

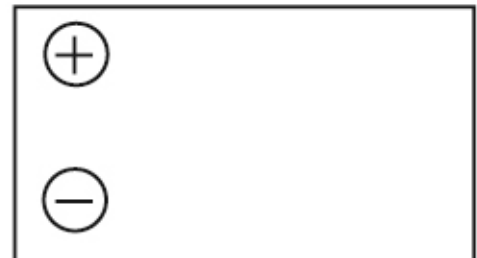

3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems
 ISO 14001 - Environmental Management Systems
 EN 18001 - OHSAS Management Systems
 UNDERWRITERS LABORATORIES Inc.



STANDARDS

IEC61056



ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE

Issue No.: V.1 / Issue Date: July 2010



YUASA BATTERY SALES
 UK LTD.
 Unit 13, Hunts Rise
 South Marston Industrial
 Estate
 Swindon
 SN3 4TG